


Overview


Overview

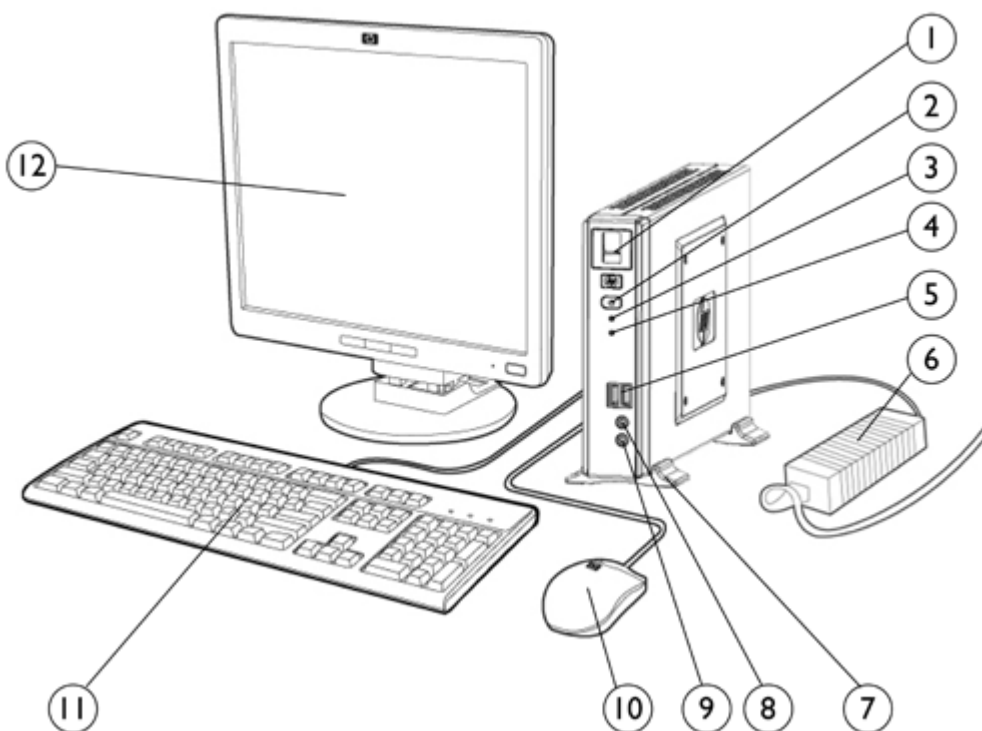

1. Bio metric sensor (optional)
2. Power button
3. Power On LED
4. Flash Activity LED
5. USB connectors (two in front)
6. 65W AC External Power Adaptor
7. Foot stand
8. Speaker/Headphone connector
9. Microphone connector
10. USB or PS/2 Mouse
11. USB or PS/2 Keyboard
12. Monitor (sold separately)

Overview

Rear view

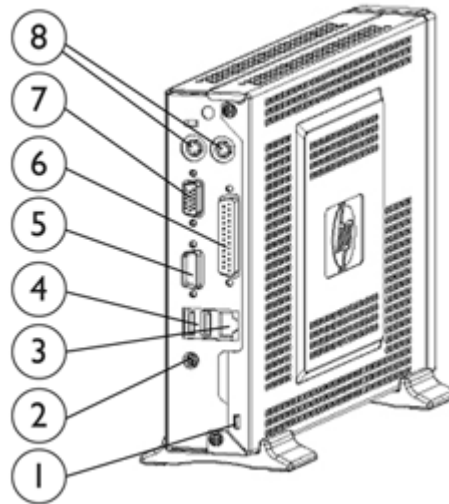

1. Kensington Cable Locking slot
2. Power connector
3. Ethernet RJ-45 connector
4. USB connectors (two in rear)
5. Serial connector
6. Parallel connector
7. VGA Monitor connector
8. PS/2 connectors (Keyboard and mouse)

At A Glance

- Chipset integrated S3 Graphics UMA Core.
- VIA C7 CPU 1.0GHz.
- Single channel DDRII SDRAM system memory.
- Internal Hard Drive.
- Integrated Realtek Audio.
- Integrated Realtek 10/100 Network connection.
- Internal speaker (Optional).
- Linux Customized Operating System.
- Innovative HP Quick Release (Optional).
- Designed and Tested for HP quality standards & Indian harsh environmental conditions.
- Protected by HP Services. Terms and conditions as applicable for India. Certain restrictions & exclusions apply.

System Details

Standard Features - Models

Processor	VIA C7 (1.0GHz).
Operating System	Linux Image.
Memory	<ul style="list-style-type: none">● DDRII SDRAM 667MHz*● 2 x DIMM slots● Support for single channel configuration● Supports up to 2 GB
	<i>*VIA chipset supports 533MHz DDRII SDRAM.</i>
Hard Drives	<ul style="list-style-type: none">● 80-GB Serial ATA 3.0-Gb/s Hard Drive (5400/7200 RPM) or● 160-GB Serial ATA 3.0-Gb/s Hard Drive (7200 RPM)
Integrated Graphics	<ul style="list-style-type: none">● Chipset integrated S3 Graphics UMA Core
Audio	<ul style="list-style-type: none">● Front Audio with Realtek ALC655 CODEC Chip.
LAN	<ul style="list-style-type: none">● Integrated Realtek 10/100 (RTL 8100C) network controller.
SATA	<ul style="list-style-type: none">● Internal two Serial ATA interfaces
Keyboard	<ul style="list-style-type: none">● USB or PS/2 (both supported)● USB or PS/2 Keyboard included with every Computer.
Mouse	<ul style="list-style-type: none">● USB or PS/2 (both supported)● USB or PS/2 Mouse included with every Computer.
Adaptor	<ul style="list-style-type: none">● 65W AC External Power Adaptor.

After-Market Options

		Part Number
Accessories	HP Quick Release Kit to connect HP LCD Monitor. Kensington Security Lock	EM870AA PC766A
Monitors	HP L1750 17" LCD Monitor HP L1506s LCD Monitor ALL HP L1908w Wide LCD Monitor HP L1908wi Wide LCD Monitor HP L1710 17-inch LCD Monitor ALL HP L1910 19-inch LCD Monitor HP w17e 17 Inch LCD Monitor HP v7650 CRT Monitor ALL HP s7540 CRT Monitor ALL HP s5502 CRT Monitor ALL L1506 LCD Monitor ALL HP LP1965 LCD Monitor ALL HP LP1965 LCD Monitor ALL HP L2045w LCD Monitor ALL	GF904AA#ACJ GL831AA#ACJ GP536AA#ACJ GP537AA#ACJ GS917AA#ACJ GS918AA#ACJ GV537AA#ACJ PF996AA#ACJ PF997AA#ACJ PQ560AA#ACJ PX848AA#ACJ RA373AA#ACJ RA374AA#ACJ RB145AA#ACJ
Speaker Bar	HP Flat Panel Speaker Bar (Supported on LCDs)	EE418AA

Technical Specifications

Processor	VIA C7 (1.0GHz)	
Memory	Single channel DDRII SDRAM system memory, (2) DIMM, supports up to 2 GB.	
Hard Drives	80GB (5400rpm or 7200rpm) or 160GB (7200rpm).	
Graphics	Chipset integrated S3 Graphics UMA Core	
Input/Output	Keyboard	HP PS2/USB Standard Keyboard
Peripheral Support	Mouse	HP PS2/USB Optical mouse
Security	Three layers of hardware security: Password protection, Chassis intrusion switch (Optional), Biometric fingerprint device on chassis front bezel (Optional).	
Kensington Cable Lock (Optional)	PC766A (for the accessories supported)	
Networking	10/100 BaseT Fast Ethernet, (RJ-45)	
I/O ports and connectors	(4) USB ports (two in front, two in rear), (2) Front Audio Ports (Mic and Headphone), (2) PS/2 Ports for Keyboard and Mouse, (1) LPT Port, (1) COM port, (1) VGA port, (1) RJ-45 Port.	
Dimensions H x W x D (approximate)	Height	7.56 in (192mm)
	Width	2.00 in (51.08mm)
	Depth	11.36 in (288.4mm)
Weight (approximate)	4.2 lb (1.9 kg)	
Temperature Range	Operating	50° to 140° F (10° to 40°C)
	Non-operating	-22° to 140°F (-30° to 60°C)
Relative Humidity (non-condensing)	Operating	10% to 90%
	Non-operating	5% to 95%
Power Supply	Operating Voltage Range	100-240V AC
	Related Line Frequency	50-60Hz
Output Voltage	19VDC	
Rated Output Current (max)	3.42Amp	
Warranty	Warranty as per the terms and conditions mentioned in the warranty manual.	

© Copyright 2008 Hewlett-Packard Development Company, L.P.
All rights reserved.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.